


Neural networks

Feedforward neural network - multilayer neural network

ARTIFICIAL NEURON

Topics: capacity of single neuron

- Can't solve non linearly separable problems...

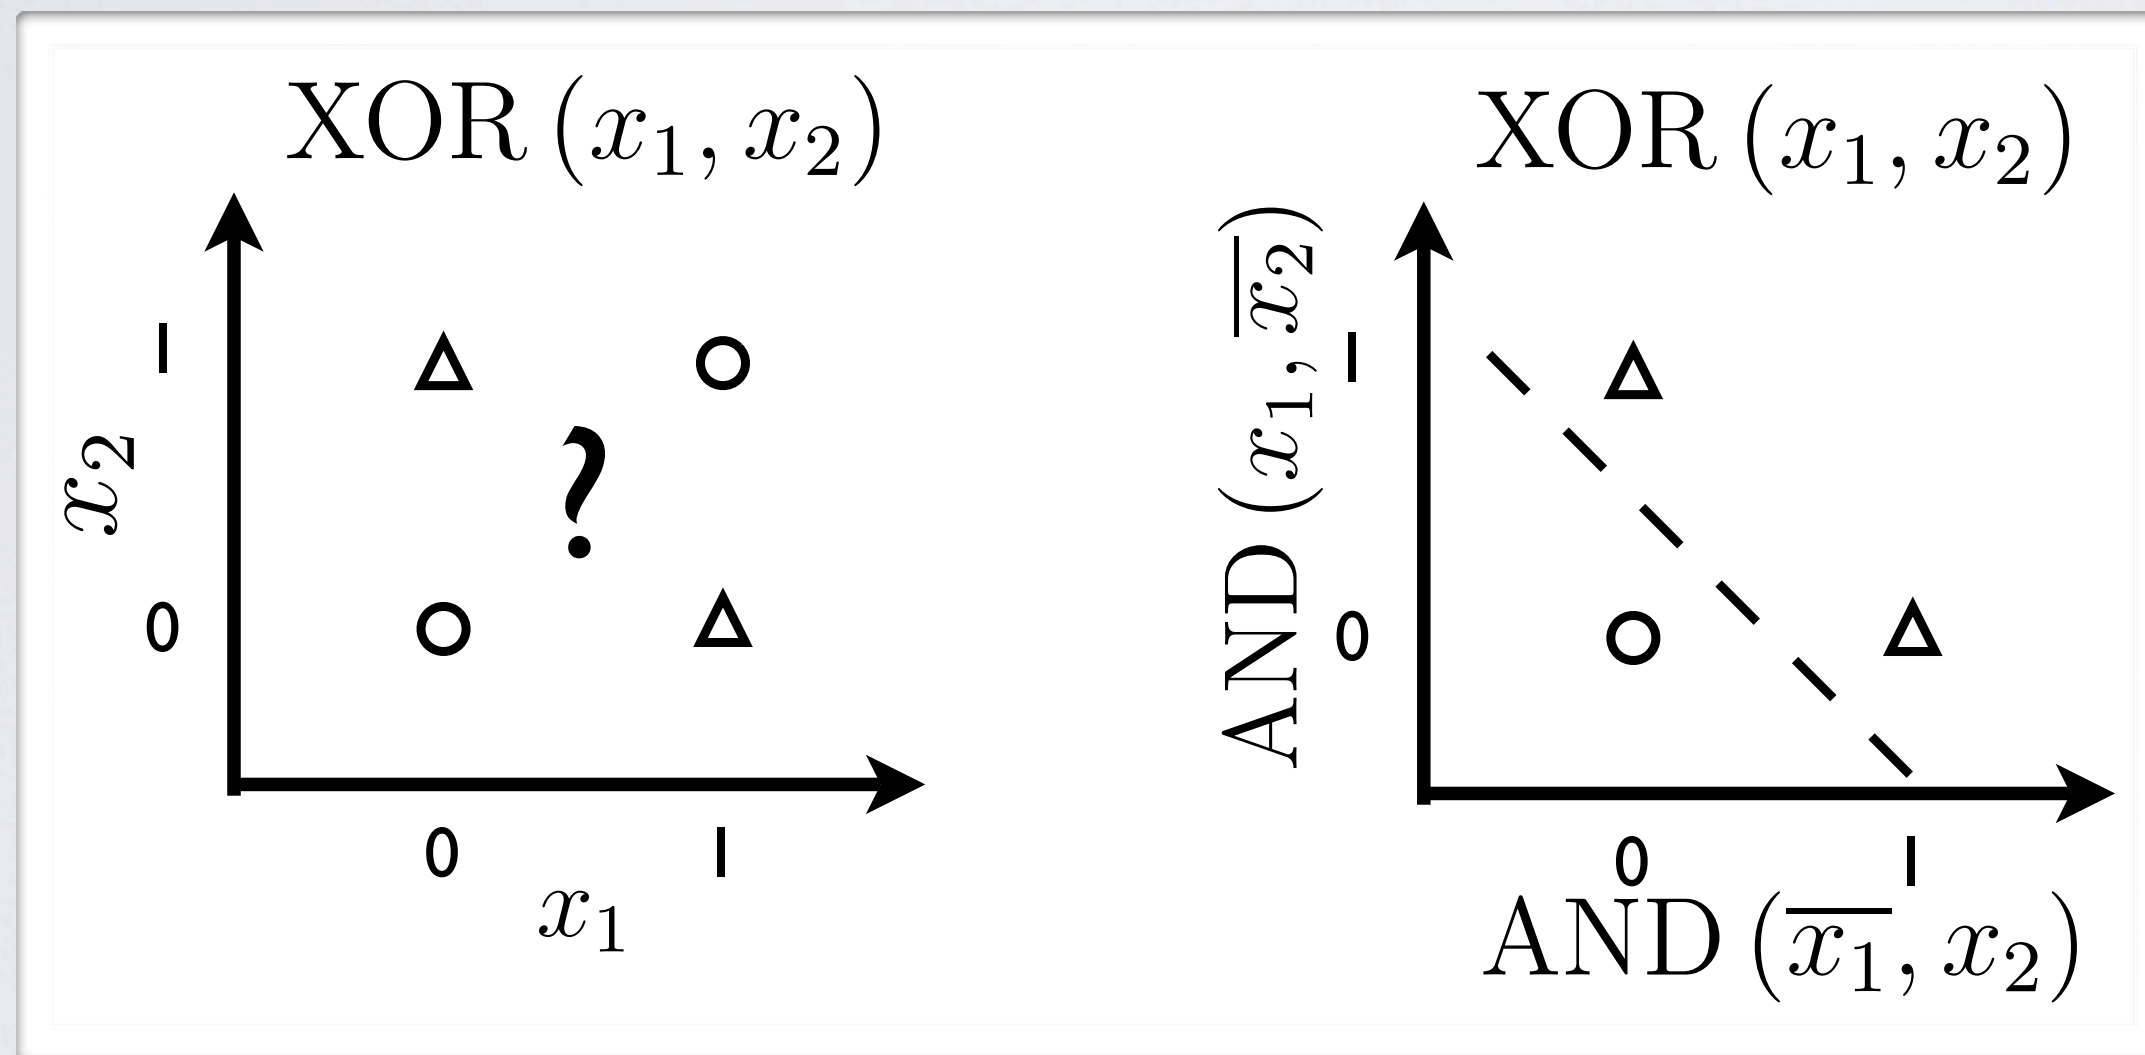

- ... unless the input is transformed in a better representation

NEURAL NETWORK

Topics: single hidden layer neural network

- Hidden layer pre-activation:

$$\mathbf{a}(\mathbf{x}) = \mathbf{b}^{(1)} + \mathbf{W}^{(1)}\mathbf{x}$$

$$(a(\mathbf{x})_i = b_i^{(1)} + \sum_j W_{i,j}^{(1)} x_j)$$


- Hidden layer activation:

$$\mathbf{h}(\mathbf{x}) = \mathbf{g}(\mathbf{a}(\mathbf{x}))$$

- Output layer activation:

$$f(\mathbf{x}) = o \left(b^{(2)} + \mathbf{w}^{(2)\top} \mathbf{h}^{(1)} \mathbf{x} \right)$$

output activation function

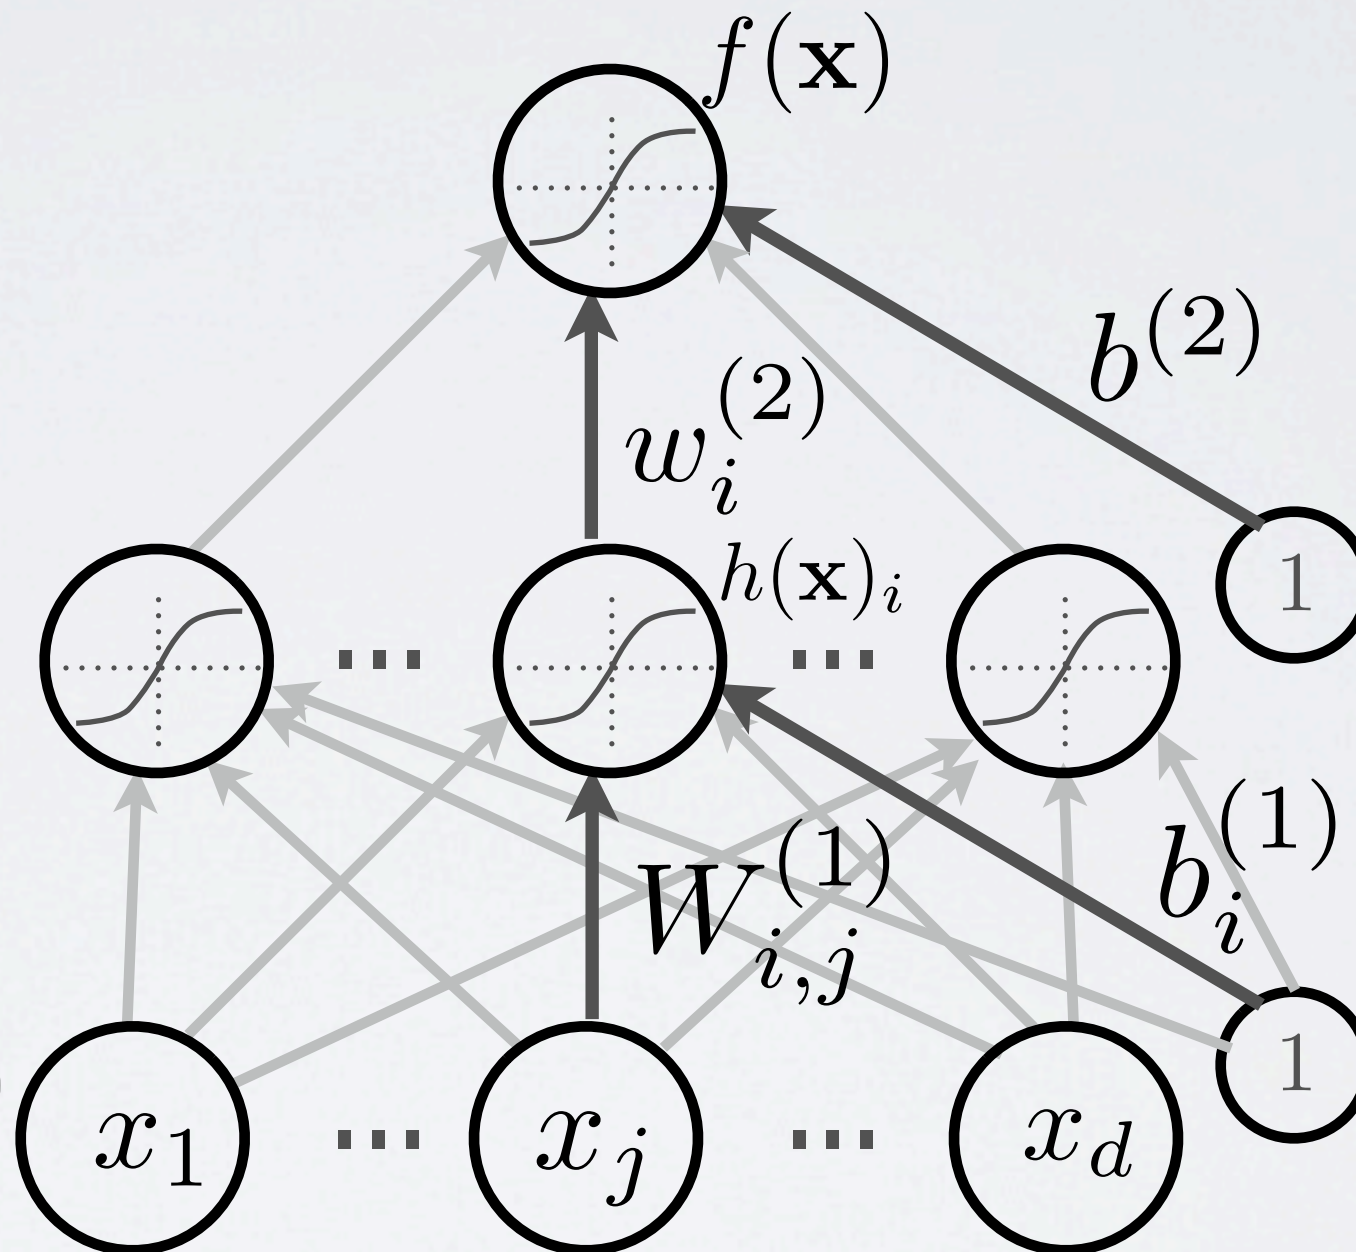

NEURAL NETWORK

Topics: softmax activation function

- For multi-class classification:

- ▶ we need multiple outputs (1 output per class)
- ▶ we would like to estimate the conditional probability $p(y = c|\mathbf{x})$

- We use the softmax activation function at the output:

$$\mathbf{o}(\mathbf{a}) = \text{softmax}(\mathbf{a}) = \left[\frac{\exp(a_1)}{\sum_c \exp(a_c)} \cdots \frac{\exp(a_C)}{\sum_c \exp(a_c)} \right]^\top$$

- ▶ strictly positive
- ▶ sums to one

- Predicted class is the one with highest estimated probability

NEURAL NETWORK

Topics: multilayer neural network

- Could have L hidden layers:

- ▶ layer pre-activation for $k > 0$ ($\mathbf{h}^{(0)}(\mathbf{x}) = \mathbf{x}$)

$$\mathbf{a}^{(k)}(\mathbf{x}) = \mathbf{b}^{(k)} + \mathbf{W}^{(k)} \mathbf{h}^{(k-1)}(\mathbf{x})$$

- ▶ hidden layer activation (k from 1 to L):

$$\mathbf{h}^{(k)}(\mathbf{x}) = \mathbf{g}(\mathbf{a}^{(k)}(\mathbf{x}))$$

- ▶ output layer activation ($k = L + 1$):

$$\mathbf{h}^{(L+1)}(\mathbf{x}) = \mathbf{o}(\mathbf{a}^{(L+1)}(\mathbf{x})) = \mathbf{f}(\mathbf{x})$$

